


Single Mode Fiber Jumper

Optowaves manufactures FC, SC, LC and other types fiber connectors, patch cords, with the single mode fiber, multimode fiber or the Polarization Maintaining fiber. It provides excellent performance, stability and has met Bellcore-1209 requirements.

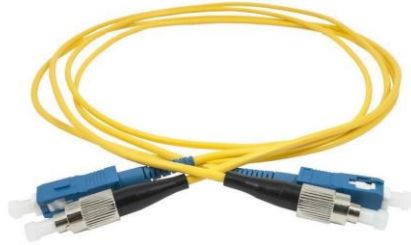

Features

- Low Insertion Loss
- High Return Loss
- High repeatability

Applications

- Fiber device
- Fiber systems
- Data Center

Specifications

Item	Unit	Specifications		
Operating Wavelength	nm	850	1060	1310 or 1550
Fiber Type		Hi 780	Hi 1060	SMF
Insertion Loss	dB	≅ 0.30	≅ 0.25	≅ 0.20
Return Loss	dB	≅ 50 (for UPC); ≅ 60 (for APC)		
Operating Temperature	°C	0 to +70		
Storage Temperature	°C	-40 to +85		

* The fiber length & the fiber type are following the customer request for jumpers.

Ordering Information

Jumper-□-□-□-□-□

